




1-866-443-6623
www.holdupdisplays.com

**HDTK549
Firearm/Fishing Rod
Track Bundle**



1 Choose a location and height for your display. Stud mounting is recommended by locating studs and mounting 16" on center apart from each other.

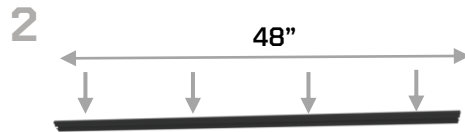


2 Mark the inside of your aluminum display track at 3" and 17" from each end of the track.



3 The mounting screws included are self-drilling. The screw itself will drill the hole it requires.



4 Insert mounting screw into screw guide.

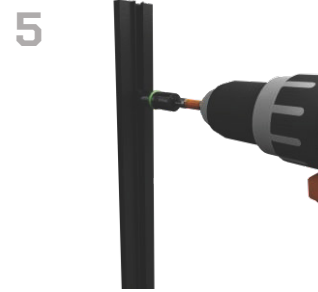

5 Place screw into channel at stud location. Firmly press both guide and drill against rail and drive screw through channel into stud.




6 If a stud is not found, these pilot holes are necessary for installing the plastic drywall anchors.




7 To insert the drywall anchors, use a screwdriver to push and turn the anchor clockwise until flush. Remount track with screw into anchors.





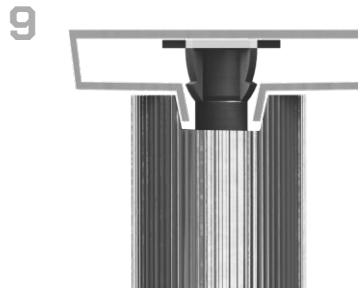

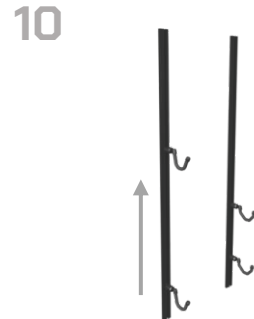


8 Once your aluminum display track is mounted you can now insert your cradles (HD49). Each set of cradles includes one narrow cradle for the trigger end and use the wide for the forward end. Each cradle comes with a barrel and a t-nut installed.



9 Insert the cradle into the HDTK: Aluminum Display Track with the t-nut inside the track as shown.



10 Once set at desired height, turn the cradle clockwise until snug and the tip of the cradle points upward then slide the cradle to desired height.

Components:	SKU:	Quantity:
	HDTK-B	1
	YOKE-HD49	5
	YOKE-HD49-WIDE	5
	Screw8x2selfdrilling	8
	Toggle	8
	screwguide	1
	phillips bit	1